

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Kazuhisa Yamamoto et al.	: Art Unit:
Serial No.:	To Be Assigned	: Examiner:
Filed:	Herewith	
For: OPTICAL DEVICE, LASER BEAM SOURCE, LASER APPARATUS AND METHOD OF PRODUCING OPTICAL DEVICE		

Divisional of:

Applicant:	Kazuhisa Yamamoto et al.	: Art Unit:	2881
Serial No.:	08/973,380	: Examiner:	G. Inzirillo
Filed:	March 16, 1998	: Allowed:	June 5, 2001
For: OPTICAL DEVICE, LASER BEAM SOURCE, LASER APPARATUS AND METHOD OF PRODUCING OPTICAL DEVICE			

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

S I R :

Prior to examination, please amend the above-identified application as follows:

DRAWINGS:

Subject to approval by the Examiner in charge of the above-identified application, amend Figures 1-6 as indicated in red on the marked-up copies of Figures 1-6 attached herewith.

Formal drawings, under a Submission of Formal Drawings, are also attached. The formal drawings incorporate the changes indicated in red on the marked up copies of Figures 1-6 attached.

SPECIFICATION:

Insert, before the first line, the sentence: "This application is a divisional of U.S. Patent Application No. 08/973,380 filed March 16, 1998."

Insert before the first sentence of the DISCLOSURE OF THE INVENTION, the sentence: "The entire disclosure of U.S. Patent Application 08/973,380 filed March 16, 1998 is expressly incorporated by reference herein."

CLAIMS:

Please cancel claims 1-13, 15-49, 55-61 and 63-77.

Please amend claims 52, 53 and 54 as follows:

1 52. A laser device according to claim 50, wherein the laser light
2 source further comprises:

3 a fiber for conveying laser light from the semiconductor laser;

4 a solid state laser crystal for receiving laser light emitted from the
5 fiber so as to generate a fundamental wave; and

6 an optimal wavelength conversion element for generating a
7 harmonic wave from the fundamental wave.

1 53. A laser device according to claim 50, wherein the
2 semiconductor laser is a distributed feedback type semiconductor laser; and the
3 laser light source further comprises a semiconductor laser amplifier for
4 amplifying laser light from the distributed feedback type semiconductor laser.

1 54. A laser device according to claim 50, wherein the laser light
2 source further comprises:

3 an optical wavelength conversion element in which an optical
4 waveguide for guiding laser light from the semiconductor laser and periodic
5 domain inverted structures are formed, wherein

6 a width and a thickness of the optical waveguide are each 40 μm or
7 greater.


Please add the following new claims 78, 79 and 80:

1 78. (Newly Added) A laser device according to claim 51,
2 wherein laser light radiation is terminated by shifting a phase-matched
3 wavelength of the optical wavelength conversion element.

1 79. (Newly Added) A laser device according to claim 52,
2 wherein laser light radiation is terminated by shifting a phase-matched
3 wavelength of the optical wavelength conversion element.

1 80. (Newly Added) A laser device according to claim 54,
2 wherein laser light radiation is terminated by shifting a phase-matched
3 wavelength of the optical wavelength conversion element.

Respectfully Submitted,



Andrew L. Ney, Reg. No. 20,300
Attorney for Applicants

ALN:aw

Enclosures:

Version with markings to show changes made
Figures 1-6 marked with red corrections

Dated: August 6, 2001
P.O. Box 980
Valley Forge, PA 19482
(610) 407-0700


The Assistant Commissioner for Patents is
hereby authorized to charge payment to
Deposit Account No. 18-0350 of any fees
associated with this communication.

EXPRESS MAIL

Mailing Label Number:
Date of Deposit:

ET548251046US
August 6, 2001

I hereby certify that this paper and fee are being deposited, under 37 C.F.R. § 1.10 and with sufficient postage, using the "Express Mail Post Office to Addressee" service of the United States Postal Service on the date indicated above and that the deposit is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.



Kathleen Libby

VERSION WITH MARKINGS TO SHOW CHANGES MADESPECIFICATION:

Specification at page 1, line 1:

-- This application is a divisional of U.S. Patent Application No. 08/973,380 filed March 16, 1998.--

Specification at page 7, line 12:

-- The entire disclosure of U.S. Patent Application No. 08/973,380 filed March 16, 1998 is expressly incorporated by reference herein.--

CLAIMS:

Please amend claims 52, 53 and 54 as follows:

1 52. (Twice Amended) A laser [light source] device according to
2 claim 50, wherein the laser light source further comprises:

3 a fiber for conveying laser light from the semiconductor laser;

4 a solid state laser crystal for receiving laser light emitted from the
5 fiber so as to generate a fundamental wave; and

6 an optimal wavelength conversion element for generating a
7 harmonic wave from the fundamental wave.

1 53. (Twice Amended) A laser [light source] device according to
2 claim 50, wherein the semiconductor laser is a distributed feedback type
3 semiconductor laser; and the laser light source further comprises a
4 semiconductor laser amplifier for amplifying laser light from the distributed
5 feedback type semiconductor laser.

1 54. (Twice Amended) A laser [light source] device according to
2 claim 50, wherein the laser light source further comprises:

- 3 an optical wavelength conversion element in which an optical
4 waveguide for guiding laser light from the semiconductor laser and periodic
5 domain inverted structures are formed, wherein
- 6 a width and a thickness of the optical waveguide are each 40 μm or
7 greater.

Claims 1-13, 15-49, 55-61 and 63-77 have been canceled.

Claims 78, 79 and 80 have been added.

FIG. 1 PRIOR ART

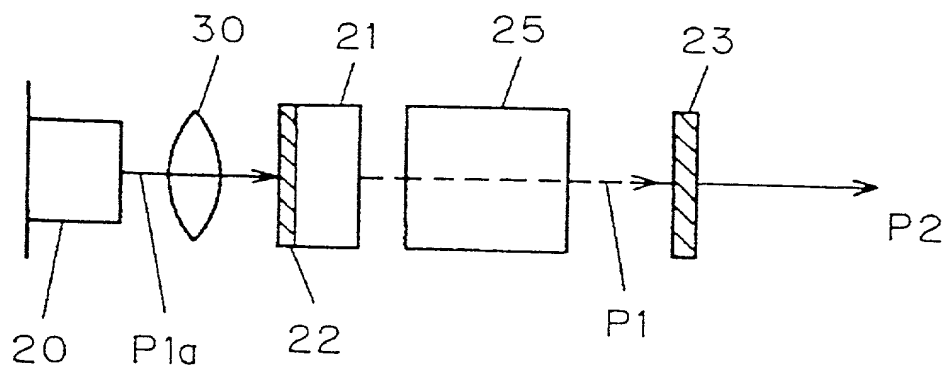


FIG. 2 PRIOR ART

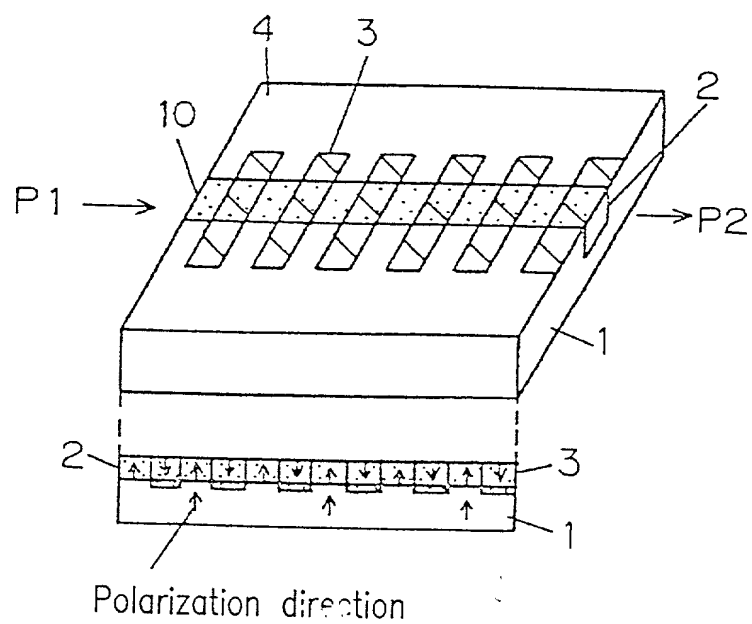


FIG. 3 **PRIOR ART**

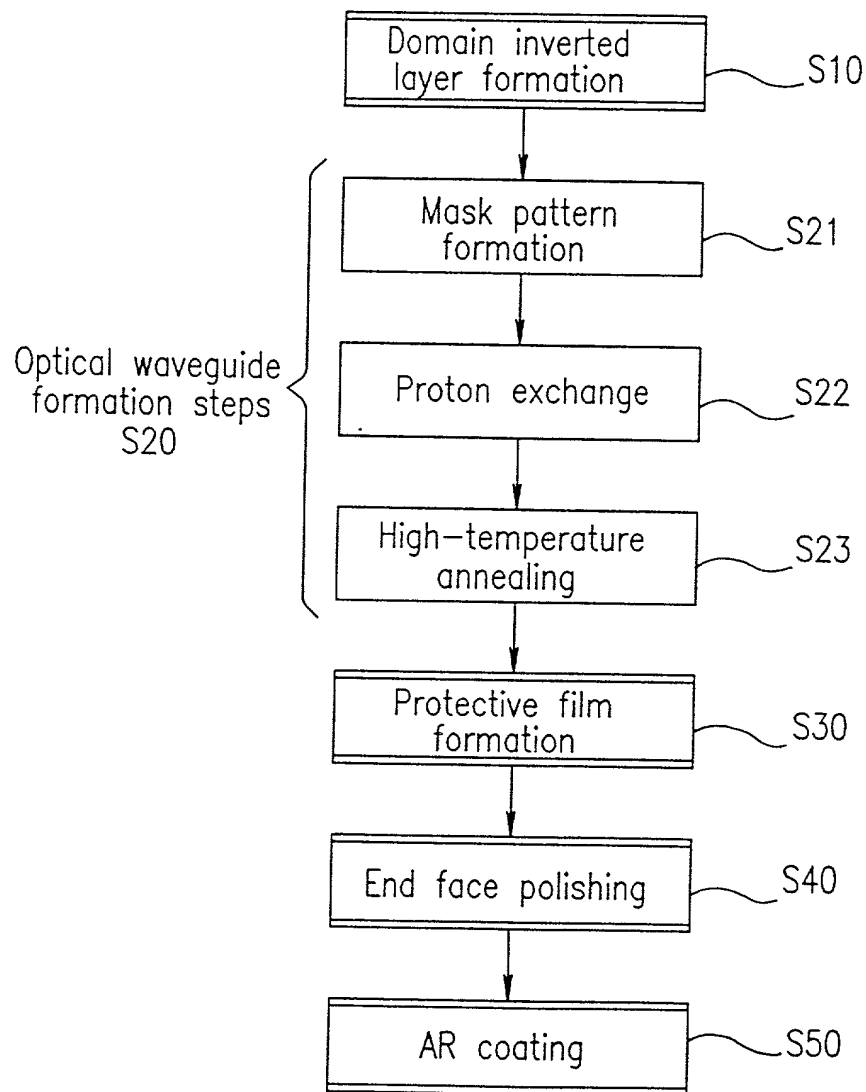


FIG. 4 PRIOR ART

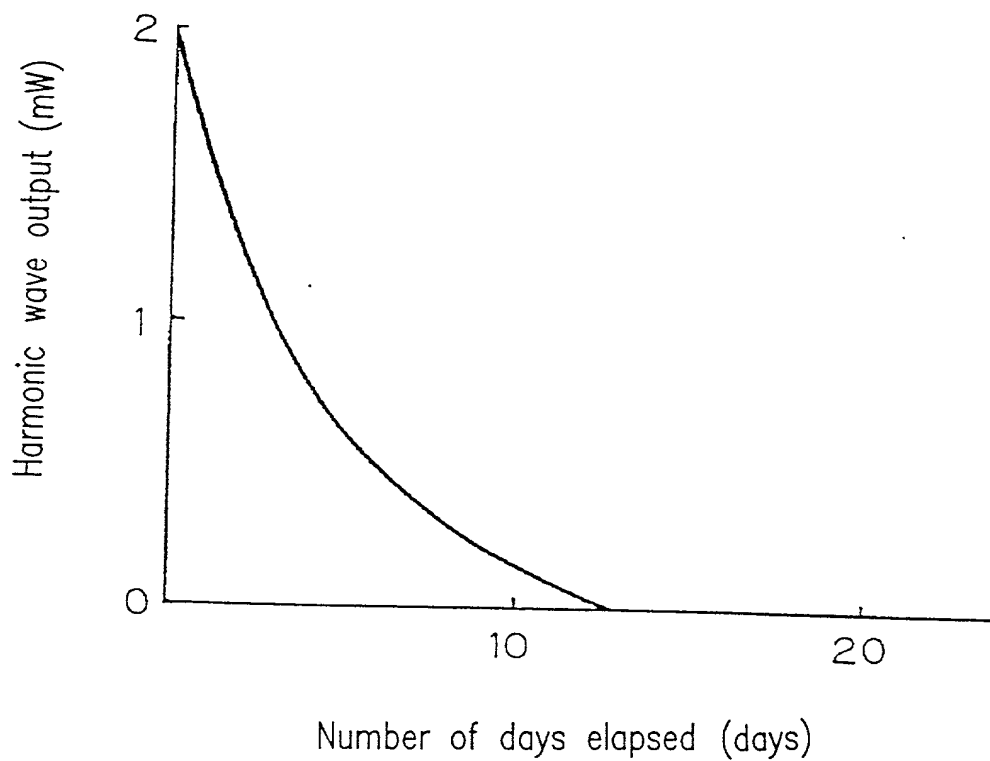


FIG. 5 PRIOR ART


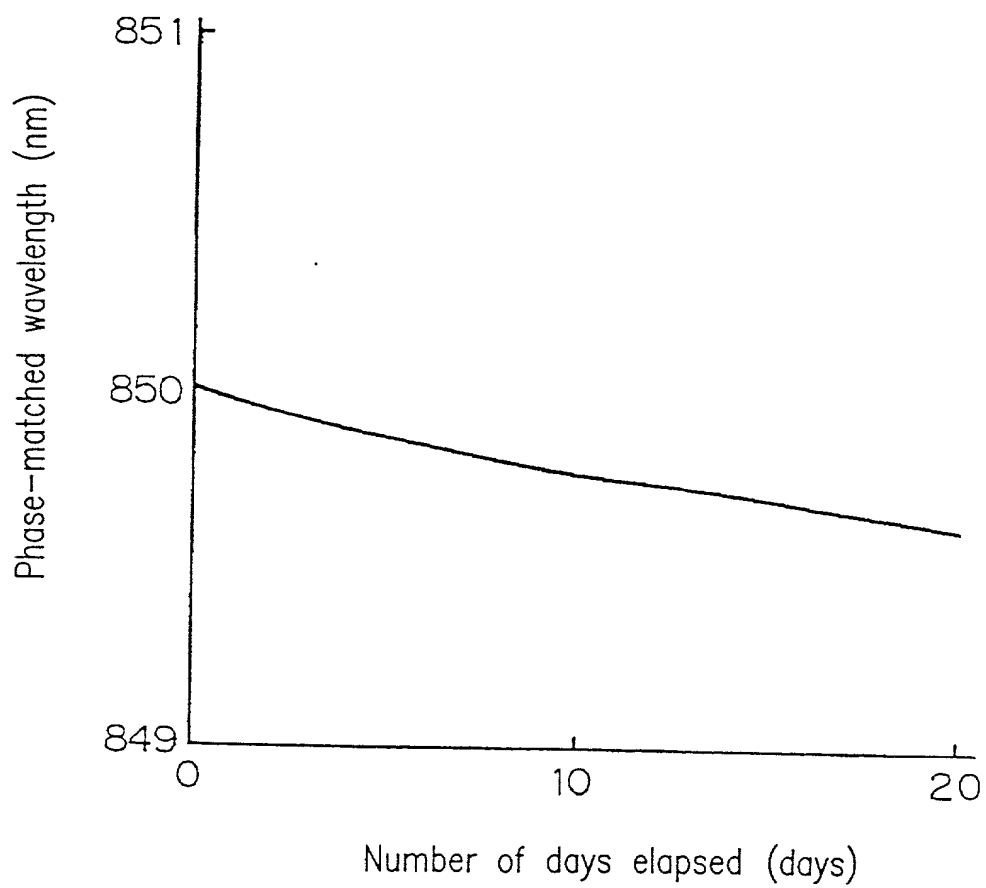


FIG. 6 PRIOR ART

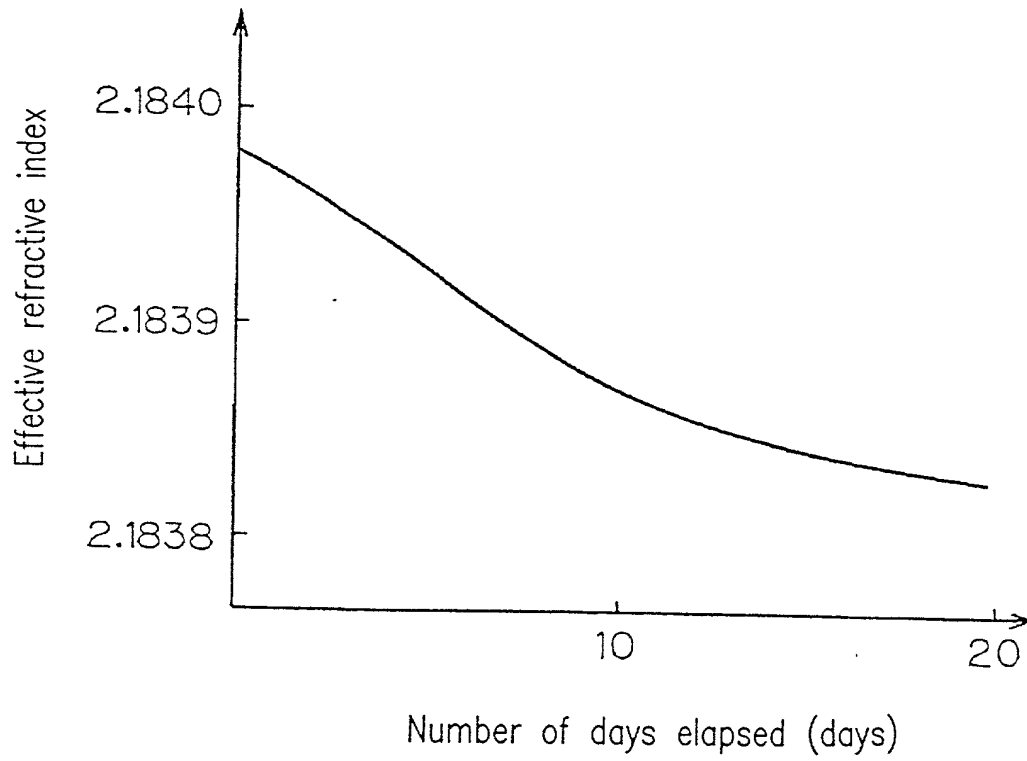

AMENDMENT

To: Commissioner of the Patent Office

1. Identification of International Application
PCT/JP96/01472

2. Applicant

Name: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.

Address: 1006, Ohaza Kadoma, Kadoma-shi, Osaka 571
Japan

Country of nationality: Japan

Country of residence: Japan

3. Agent:

Name: 7828 YAMAMOTO Shusaku

Address: Fifteenth Floor, Crystal Tower, 2-27, Shiromi
1-chome, Chuo-ku, Osaka-shi, Osaka 540 Japan

4. Item to be Amended

Claims

5. Subject Matter of Amendment

As per the attached sheets

6. List of Attached Documents:

New sheets for "Claims" from page 43 to page 57, and
page 57/1; one copy for each

CLAIMS

1. (Amended) A method for producing an optical element, comprising:

a step of forming a proton exchange layer in an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate so as to form an optical waveguide; and

a low-temperature annealing step of performing a heat treatment for the substrate at a temperature of 120°C or lower for 1 hour or more.

2. (Amended) A method for producing an optical element according to claim 1, wherein the low-temperature annealing step is performed at a temperature equal to or higher than 50°C but lower than or equal to 90°C .

3. (Amended) A method for producing an optical element according to claim 1, wherein the low-temperature annealing step comprises a step of gradually lowering the temperature.

4. (Amended) A method for producing an optical element according to claim 1, wherein the step of forming the proton exchange layer so as to form an optical waveguide comprises:

a step of performing a proton exchange process for the substrate; and a high-temperature annealing step of performing a heat treatment for the substrate at a temperature of 150°C or higher.

5. (Amended) A method for producing an optical element according to claim 4, wherein the low-temperature annealing step is performed at a temperature equal to or higher than 50°C but lower than or equal to 90°C .

6. (Amended) A method for producing an optical element according to claim 4, wherein the low-temperature annealing step comprises a step of gradually lowering the temperature.

7. (Amended) A method for producing an optical element according to claim 1, wherein the step of forming the proton exchange layer so as to form an optical waveguide comprises: a step of forming a plurality of periodically-arranged domain inverted layers in the substrate; and a step of forming an optical waveguide on a surface of the substrate.

8. A method for producing an optical element, comprising:
a step of performing a proton exchange process for an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate; and

an annealing step of performing a plurality of heat treatments including at least first and second heat treatments for the substrate,

wherein a temperature of the second annealing is lower than a temperature of the first annealing by 200°C or more.

9. A method for producing an optical element according to claim 8, wherein the second annealing is performed at a temperature equal to or higher than 50°C but lower than or equal to 90°C.

10. An optical element, comprising an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate and a proton exchange layer formed in the substrate, wherein the optical element is formed of a stable proton exchange layer such that a refractive index of the proton exchange layer does not vary with time during operation.

11. An optical element according to claim 10, wherein at least a portion of the proton exchange layer forms an optical waveguide.

12. A light source comprising: a semiconductor laser; and an optical wavelength conversion element for receiving laser light emitted from the semiconductor laser so as to convert the laser light to a harmonic wave, wherein:

the optical wavelength conversion element includes: an optical waveguide for guiding the laser light; and domain inverted structures periodically arranged along the optical waveguide, the optical waveguide and the domain inverted structures being formed of a stable proton exchange layer whose refractive index does not vary with time during operation.

13. (Amended) A laser light source comprising:

a semiconductor laser for emitting a fundamental wave;

a single mode fiber for conveying the fundamental wave; and

an optical wavelength conversion element for receiving the fundamental wave emitted from the fiber so as to generate a harmonic wave, the optical wavelength conversion element having periodic domain inverted structures,

wherein the optical wavelength conversion element has a modulation function.

14. (Canceled)

15. A laser light source according to claim 13, wherein the optical wavelength conversion element is formed in an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate.

16. (Amended) A laser light source, comprising:

a semiconductor laser for emitting a pumped light;

a fiber for conveying the pumped light;

a solid state laser crystal for receiving the pumped light emitted from the fiber so as to generate a fundamental wave; and

an optical wavelength conversion element for receiving the fundamental wave so as to generate a harmonic wave, the optical wavelength conversion element having periodic domain inverted structures.

17. A laser light source according to claim 16, wherein the optical wavelength conversion element has a modulation function.

18. A laser light source according to claim 16, wherein the optical wavelength conversion element is formed in an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate.

19. A laser light source according to claim 16, wherein the solid state laser crystal and the optical wavelength conversion element are integrated together.

20. (Amended) A laser light source, comprising:

a semiconductor laser for emitting a pumped light;

a solid state laser crystal for receiving the pumped light so as to generate a fundamental wave;

a single mode fiber for conveying the fundamental wave; and

an optical wavelength conversion element for receiving the fundamental wave from the fiber so as to generate a harmonic wave, the optical wavelength conversion element having periodic domain inverted structures.

21. A laser light source according to claim 20, wherein the optical wavelength conversion element has a modulation function.

22. A laser light source, comprising:

a distributed feedback type semiconductor laser for emitting laser light;

a semiconductor laser amplifier for amplifying the laser light; and

an optical wavelength conversion element for receiving the amplified laser light so as to generate a harmonic wave, the optical wavelength conversion element having periodic domain inverted structures.

23. A laser light source according to claim 22, wherein the optical wavelength conversion element has a modulation function.

24. A laser light source according to claim 22, wherein the optical wavelength conversion element is formed in an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate.

25. A laser light source according to claim 22, wherein the semiconductor laser is wavelength-locked.

26. A laser light source, comprising:

a semiconductor laser for emitting laser light;

and

an optical wavelength conversion element in which periodic domain inverted structures and an optical waveguide are formed,

wherein a width and a thickness of the optical waveguide are each 40 μm or greater.

27. A laser light source according to claim 26, wherein the optical wavelength conversion element has a modulation function.

28. A laser light source according to claim 26, wherein the optical wavelength conversion element is formed in an $\text{LiNb}_x\text{Ta}_{1-x}\text{O}_3$ ($0 \leq x \leq 1$) substrate.

29. A laser light source according to claim 26, wherein the optical waveguide is of a graded type.

30. (Amended) A laser device, comprising:

a laser light source having a semiconductor laser for radiating laser light and an optical wavelength conversion element for generating a harmonic wave based on the laser light;

a modulator for modulating an output intensity of the harmonic wave; and

a deflector for changing a direction of the harmonic wave emitted from the laser light source,
wherein periodic domain inverted structures are formed in the optical wavelength conversion element, and
the semiconductor laser is wavelength-locked.

31. (Amended) A laser device according to claim 30, wherein the laser light source further comprises:

a single mode fiber for conveying the laser light from the semiconductor laser to the optical wavelength conversion element.

32. (Amended) A laser light source according to claim 76, wherein the laser light source further comprises a fiber for conveying the laser light from the semiconductor laser to the solid state laser crystal.

33. (Amended) A laser light source according to claim 30, wherein:

the semiconductor laser is a distributed feedback type semiconductor laser; and

the laser light source further comprises a semiconductor laser amplifier for amplifying the laser light from the distributed feedback type semiconductor laser.

34. (Amended) A laser light source according to claim 30 or 76, wherein: an optical waveguide is further formed in the optical wavelength conversion element; and

a width and a thickness of the optical waveguide are each 40 μm or greater.

35. (Amended) A laser device, comprising:

an ultraviolet laser light source comprising an optical wavelength conversion element, in which periodic domain inverted structures are formed, and being configured so as to be capable of radiating modulated ultraviolet laser light; and

a deflector for changing a direction of the ultraviolet laser light,

wherein the deflector irradiates a screen with the ultraviolet laser light so as to generate red, green or blue light from a fluorescent substance being applied on the screen.

36. (Amended) A laser device according to claim 35, wherein the laser light source further comprises:

a semiconductor laser; and

a single mode fiber for conveying laser light from the semiconductor laser to the optical wavelength conversion element, and

the optical wavelength conversion element generates harmonic wave based on the conveyed laser light.

37. (Amended) A laser light source according to claim 35, wherein the laser light source further comprises:

a semiconductor laser;

a fiber for conveying laser light from the semiconductor laser; and

a solid state laser crystal for receiving laser light emitted from the fiber so as to generate a fundamental wave, and

the optical wavelength conversion element generates a harmonic wave from the fundamental wave.

38. (Amended) A laser light source according to claim 35, wherein the laser light source further comprises:

a distributed feedback type semiconductor laser; and a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

39. (Amended) A laser light source according to claim 35, wherein: the laser light source further comprises a semiconductor laser for emitting laser light;

an optical waveguide for guiding the laser light

is further formed in the optical wavelength conversion element; and

a width and a thickness of the optical waveguide are each 40 μm or greater.

40. (Amended) A laser device, comprising:

three laser light sources for generating red, green and blue laser light beams;

a modulator for changing an intensity of each of the laser light beams; and

a deflector for changing a direction of each of the laser light beams,

wherein at least one of the three laser light sources is formed of a semiconductor laser and an optical wavelength conversion element having periodic domain inverted structures, and

laser light emitted from the semiconductor laser is locked.

41. (Amended) A laser device according to claim 40, wherein the laser light source further comprises a single mode fiber for conveying the laser light from the semiconductor laser to the optical wavelength conversion element, and

the optical wavelength conversion element receives the laser light emitted from the fiber as a fundamental wave, and generates a harmonic wave based thereon.

42. (Amended) A laser light source according to claim 77, wherein the laser light source further comprises a fiber for conveying the laser light from the semiconductor laser to the solid state laser crystal.

43. (Amended) A laser light source according to claim 40, wherein the semiconductor laser is a distributed feedback type semiconductor laser, and the laser light source further comprises a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

44. (Amended) A laser light source according to claim 40 or 77, wherein an optical waveguide for guiding the laser light is further formed in the optical wavelength conversion element, and

a width and a thickness of the optical waveguide are each 40 μm or greater.

45. A laser device, comprising:

at least one laser light source including a semiconductor laser;

a sub-semiconductor laser;

a modulator for changing an intensity of light from the laser light source;

a screen; and

a deflector for changing a direction of light from the laser light source so as to scan the screen with the light,

wherein light emitted from the sub-semiconductor laser scans a peripheral portion of the screen; and radiation of laser light from the laser light source is terminated when an optical path of the light emitted from the sub-semiconductor laser is blocked.

46. (Amended) A laser device according to claim 45, wherein the laser light source further comprises:

an optical wavelength conversion element for generating a harmonic wave; and

a single mode fiber for conveying laser light from the semiconductor laser to the optical wavelength conversion element.

47. (Amended) A laser light source according to claim 45, wherein the laser light source further comprises:

a fiber for conveying laser light from the semiconductor laser;

a solid state laser crystal for receiving laser light emitted from the fiber so as to generate a fundamental wave; and

an optical wavelength conversion element for generating a harmonic wave from the fundamental wave.

48. (Amended) A laser light source according to claim 45, wherein the semiconductor laser is a distributed feedback type semiconductor laser; and the laser light source further comprises a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

49. (Amended) A laser light source according to claim 45, wherein the laser light source further comprises:

an optical wavelength conversion element in which an optical waveguide for guiding laser light from the semiconductor laser and periodic domain inverted structures are formed, wherein

a width and a thickness of the optical waveguide are each 40 μm or greater.

50. A laser device, comprising:

at least one laser light source including a semiconductor laser;

a deflector for changing a direction of laser light radiated from the laser light source so as to scan the screen with the laser light, wherein:

the device further comprises two or more detectors for generating a signal when receiving a portion of the laser; and

generation of laser light from the laser light source is terminated when the detector does not generate a signal for a certain period of time while the deflector scans the screen with the laser light.

51. (Amended) A laser device according to claim 50, wherein the laser light source further comprises:

an optical wavelength conversion element for generating a harmonic wave; and

a single mode fiber for conveying laser light

from the semiconductor laser to the optical wavelength conversion element.

52. (Amended) A laser light source according to claim 50, wherein the laser light source further comprises:

a fiber for conveying laser light from the semiconductor laser;

a solid state laser crystal for receiving laser light emitted from the fiber so as to generate a fundamental wave; and

an optical wavelength conversion element for generating a harmonic wave from the fundamental wave.

53. (Amended) A laser light source according to claim 50, wherein the semiconductor laser is a distributed feedback type semiconductor laser; and the laser light source further comprises a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

54. (Amended) A laser light source according to claim 50, wherein the laser light source further comprises:

an optical wavelength conversion element in which an optical waveguide for guiding laser light from the semiconductor laser and periodic domain inverted structures are formed, wherein

a width and a thickness of the optical waveguide are each 40 μm or greater.

55. (Amended) A laser device, comprising:

at least one laser light source including a semiconductor laser;

a modulator for changing an intensity of each laser light; and

a deflector for changing a direction of each laser light,

wherein laser light emitted from the laser light source is split into two or more optical paths, and the

respective split laser light is separately modulated with modulators to which signals different from each other are input, and a screen is irradiated with the separately modulated respective laser light from two directions.

56. (Amended) A laser device according to claim 55, wherein the laser light source further comprises:

an optical wavelength conversion element for generating a harmonic wave; and

a single mode fiber for conveying laser light from the semiconductor laser to the optical wavelength conversion element.

57. (Amended) A laser light source according to claim 55, wherein the laser light source further comprises:

a fiber for conveying laser light from the semiconductor laser;

a solid state laser crystal for receiving laser light emitted from the fiber so as to generate a fundamental wave; and

an optical wavelength conversion element for generating a harmonic wave from the fundamental wave.

58. (Amended) A laser light source according to claim 55, wherein the semiconductor laser is a distributed feedback type semiconductor laser; and the laser light source further comprises a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

59. (Amended) A laser light source according to claim 55, wherein the laser light source further comprises:

an optical wavelength conversion element in which an optical waveguide for guiding laser light from the semiconductor laser and periodic domain inverted structures are formed,

wherein a width and a thickness of the optical waveguide are each 40 μm or greater.

60. A laser device according to claim 55, wherein two optical paths are formed by two laser light sources, and the laser light sources respectively experience different modulations.

61. A laser device according to claim 55, wherein the two optical paths are switched with each other based on time.

62. (Canceled)

63. (Amended) A laser device, comprising:

at least one laser light source including a semiconductor laser;

a first optical system for setting laser light emitted from the laser light source into a parallel beam;

a liquid crystal cell for spatially modulating the parallel beam; and

a second optical system for irradiating a screen with light emitted from the liquid crystal cell, wherein the laser light source further comprises:

an optical wavelength conversion element for generating a harmonic wave; and

a single mode fiber for conveying laser light from the semiconductor laser to the optical wavelength conversion element.

64. (Amended) A laser device, comprising:

at least one laser light source including a semiconductor laser;

a first optical system for setting laser light emitted from the laser light source into a parallel beam;

a liquid crystal cell for spatially modulating the parallel beam; and

a second optical system for irradiating a screen with light emitted from the liquid crystal cell, wherein the laser light source further comprises:

a fiber for conveying laser light from the semiconductor laser;

a solid state laser crystal for receiving laser light emitted from the fiber so as to generate a fundamental wave; and

an optical wavelength conversion element for generating a harmonic wave from the fundamental wave.

65. (Amended) A laser device, comprising:

at least one laser light source including a semiconductor laser;

a first optical system for setting laser light emitted from the laser light source into a parallel beam;

a liquid crystal cell for spatially modulating the parallel beam; and

a second optical system for irradiating a screen with light emitted from the liquid crystal cell,

wherein the semiconductor laser is a distributed feedback type semiconductor laser; and

the laser light source further comprises a semiconductor laser amplifier for amplifying laser light from the distributed feedback type semiconductor laser.

66. (Amended) A laser device, comprising:

at least one laser light source including a semiconductor laser;

a first optical system for setting laser light emitted from the laser light source into a parallel beam;

a liquid crystal cell for spatially modulating the parallel beam; and

a second optical system for irradiating a screen with light emitted from the liquid crystal cell,

wherein the laser light source further comprises an optical wavelength conversion element in which an optical waveguide for guiding laser light from the semiconductor laser and periodic domain inverted structures are formed, and

a width and a thickness of the optical waveguide are each 40 μm or greater.

67. (Amended) A laser device according to claim 45, wherein the sub-semiconductor laser is an infrared semiconductor laser.

68. (Amended) A laser device according to claim 46, 47, 49, 51, 52 or 54, wherein laser light radiation is terminated by shifting a phase-matched wavelength of the optical wavelength conversion element.

69. (Amended) An optical disk apparatus, comprising:

an optical pickup incorporating therein an optical wavelength conversion element for converting a fundamental wave to a harmonic wave;

a laser light source, provided separately from the optical pickup, for generating laser light; and

an actuator for moving the optical pickup, wherein the laser light radiated from the laser light source is incident upon the optical pickup via an optical fiber.

70. An optical disk apparatus according to claim 69, wherein the laser light source includes a semiconductor laser disposed outside the optical pickup.

71. An optical disk apparatus according to claim 70, wherein the laser light source further comprises a solid state laser crystal for generating a fundamental wave using laser light emitted from the semiconductor laser as pumped light.

72. An optical disk apparatus according to claim 71, wherein: the solid state laser crystal is disposed outside the optical pickup; and the fundamental wave generated by the solid state laser medium is incident upon the optical wavelength conversion element via the optical fiber.

73. An optical disk apparatus according to claim 71, wherein: the solid state laser crystal is disposed inside

the optical pickup; and the laser light emitted from the semiconductor laser is incident upon the solid state laser via the optical fiber.

74. A laser light source according to claim 30, wherein a harmonic wave is superimposed over the semiconductor laser during operation.

75. A laser light source according to claim 40, wherein a harmonic wave is superimposed over the semiconductor laser during operation.

76. (Added) A laser device, comprising:

a laser light source comprising: a semiconductor laser for radiating laser light; a solid state laser crystal for receiving laser light radiated from the semiconductor laser so as to generate a fundamental wave; and an optical wavelength conversion element for generating a harmonic wave based on the fundamental wave;

a modulator for modulating an output intensity of the harmonic wave; and

a deflector for changing a direction of the harmonic wave emitted from the laser light source,

wherein periodic domain inverted structures are formed in the optical wavelength conversion element, and

a wavelength of the fundamental wave incident on the optical wavelength conversion element is set to be constant.

77. (Added) A laser device, comprising:

three laser light sources generating red, green and blue laser light;

a modulator for changing an intensity of each laser light; and

a deflector for changing a direction of each laser light,

wherein at least one of the three laser light sources is formed of: a semiconductor laser; a solid state

laser crystal for receiving laser light radiated from the semiconductor laser so as to generate a fundamental wave; and an optical wavelength conversion element for generating a harmonic wave based on the fundamental wave,

periodic domain inverted structures are formed in the optical wavelength conversion element, and

a wavelength of the fundamental wave incident on the optical wavelength conversion element is set to be constant.